



# Marc Climatic Controls, Inc.

## HAZARDOUS LOCATION

### Wall Fans - Supply and Exhaust Class I, Division 2, Groups C, D or B, C, D

#### Features:

- CSA certified assuring safety and performance.
- Spark proof construction.
- Through the wall installation.
- 3/4" NPT connection and terminals for easy power wiring and no seal required.
- Backdraft damper.
- Aluminum mesh filter on air inlet for supply fans.
- Screen guard on air inlet for exhaust fans.
- Painted galvanized steel cabinet.
- Angle flashing provided for indoors and out.

#### Options:

- Dual fan arrangement.
- Manual operator for adjusting air flow.
- Stainless steel cabinet.
- Flanged fresh air inlet.
- Other filter types.
- Deeper cabinet for thicker building walls (standard cabinet is for 3" wall).
- Motor starter or disconnect.
- Air flow switch with form C contacts.
- Class I, Division 1, Groups B, C, D or C, D (non-certified).

#### SUPPLY FAN



WSFX SERIES

#### EXHAUST FAN



WEFX SERIES

**WALL FANS**  
**SINGLE OR DUAL FANS\*\***  
**- 60 HZ -**


**HAZARDOUS LOCATIONS**  
**CLASS I, DIVISION 2, GROUPS C,D OR B,C,D**

OPERATING TEMPERATURE CODE (SEE CHART)

Model	Volts Phase Hertz	Operating Temperature Code	Unit Amps (2)	Dimensions		
				W	H	D
WSFX•WEFX10S * -116	115-1-60	T3A - 356°F (180°C)	1.7	12"	12"	24"
WSFX•WEFX12S * -116	115-1-60	T3A	1.7	18"	18"	24"
WSFX•WEFX14SC -116	115-1-60	T3B - 329°F (165°C)	4.2	18"	18"	24"
WSFX•WEFX10S * -216	230/208-1-60	T3A	0.9	12"	12"	24"
WSFX•WEFX12S * -216	230/208-1-60	T3A	0.9	18"	18"	24"
WSFX•WEFX14SC -216	230/208-1-60	T3B	2.1	18"	18"	24"
WSFX•WEFX10S * -236	230/208-3-60	T3C - 320 F (160°C)	1.4	12"	12"	24"
WSFX•WEFX12S * -236	230/208-3-60	T3C	1.4	18"	18"	24"
WSFX•WEFX14S * -236	230/208-3-60	T3C	1.2	18"	18"	24"
WSFX•WEFX10S * -436	460-3-60	T3C	0.7	12"	12"	24"
WSFX•WEFX12S * -436	460-3-60	T3C	0.7	18"	18"	24"
WSFX•WEFX14S * -436	460-3-60	T3C	0.6	18"	18"	24"

(1) May vary depending upon motor selection.

\* Insert "C" for Groups C,D, or "B" for Groups B,C,D  
 \*\* For "Dual Fan" insert "D" in model no. in lieu of "S"  
 (example: WSFX10D\*-116)

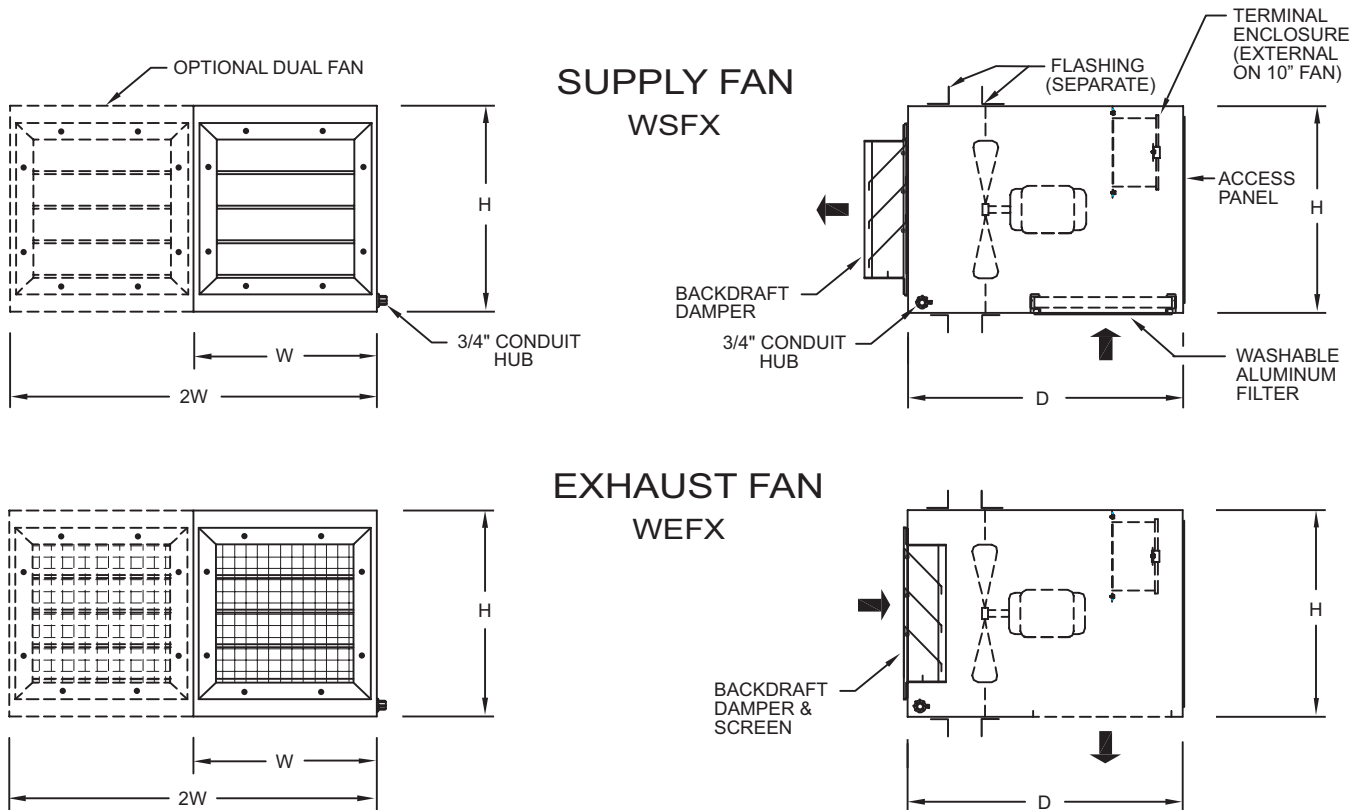

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE 1-15-06



**Marc Climatic Controls, Inc.**

P. O. Box 218309 • Houston, Texas 77218 USA

Phone (713) 464-8587 • Fax (713) 468-8810

www.marcclimatic.com • E-mail: sales@marcclimatic.com

COPYRIGHT © 2003 Marc Climatic Controls, Inc. All Rights Reserved



C US